


# LASH®

LEVEL • ALIGN • SPACE • HOLD



## TILE LEVELING SYSTEM - CLIPS & WEDGES

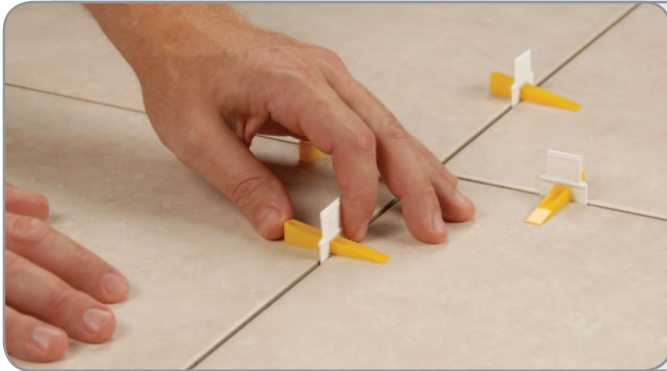

**LEVEL:** Anchor adjusts to the tiles so they remain level throughout the installation

**ALIGN:** Designed to address variations in tile thickness

**SPACE:** Produces a 1/16 inch wide grout joint between tiles

**HOLD:** Holds tiles firmly in place to ensure a lippage-free surface

### CLIPS

Patented 2-part system available in two sizes

A + B for 3/16 in. to 7/16 in. tile

XL A + XL B for 1/2 in. to 3/4 in. tile

### WEDGES

Great for thin tiles, too!

**A**



Easy Snap-Off design



Anchor holes in each side allow mortar to disperse evenly to eliminate potential voids


NEW!

**A**

NEW!

**B**

Reusable wedge reduces the overall cost of the system

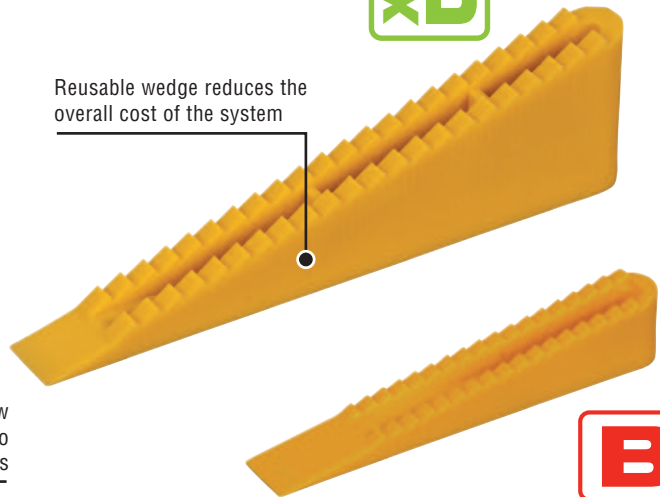

**B**

Designed for quick installation, the LASH® Tile Leveling 2-part system (sold separately) reduces costly call backs by ensuring that the finished floor surface is lippage-free. It is the perfect system to use with large-format rectified porcelain, thin porcelain tile, marble and stone where narrow grout joints are required, or with tiles of different thickness. This system is fast, simple and the most cost effective installation method on the market to eliminate lippage.

The LASH System provides narrow 1/16 inch grout lines. For grout joints up to 1/4 inch, traditional spacers can be used.

U.S. Patent No. 7,992,354

The Brand that Stands for Excellence.

[www.QEP.com](http://www.QEP.com)

U.S. Headquarters  
866 435 8665

Canada  
800 840 9422


Europe/Middle East  
0031 24 6485348

Australia  
011 61 3 9797 1888


New Zealand  
64 9 415 9700

**Easy to install and remove!**


Watch a demonstration video at: [www.lashspacer.com](http://www.lashspacer.com)

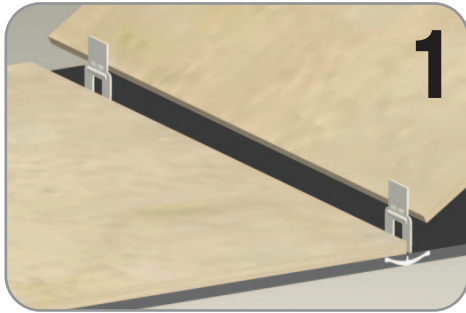

Slide two clips under the tile and into the mortar approximately 2" from each end of the tile. Place the second tile.

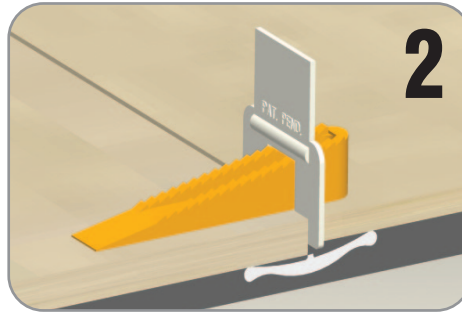

Slide the reusable wedges into the clips to **LEVEL, ALIGN, SPACE** and **HOLD** the tiles.

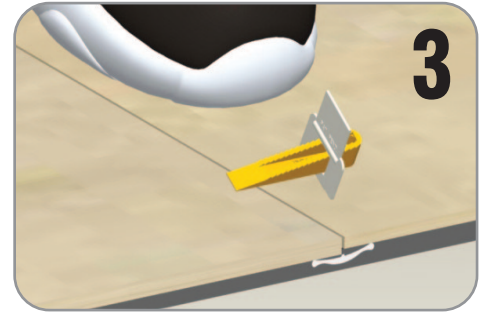


Once the mortar sets, simply kick the clips, forcing them to snap off at the specially designated break-points. Save wedges for future use.

Item #	Tile thickness	Type	Quantity
<b>NEW</b> 99760Q	1/2 in. to 3/4 in.	<b>xl A CLIPS</b>	50/bag (8/cs)
<b>NEW</b> 99765Q	1/2 in. to 3/4 in.	<b>xl B WEDGES</b>	50/bag (8/cs)
99720Q	3/16 in. to 7/16 in.	<b>A CLIPS</b>	96/container (8/cs)
99725Q	3/16 in. to 7/16 in.	<b>B WEDGES</b>	96/container (8/cs)
99702Q	3/16 in. to 7/16 in.	<b>A CLIPS</b>	4800 pc. contractor pack
99703Q	3/16 in. to 7/16 in.	<b>B WEDGES</b>	3600 pc. contractor pack

**Use with 99750Q LASH Pliers:**



- Provide maximum force to push wedges into clips
- Speeds up tile installation when using QEP LASH Tile Leveling System

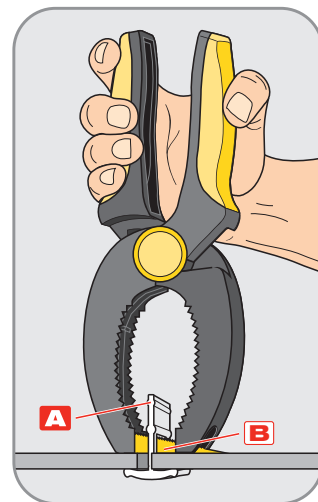

**The Brand that Stands for Excellence.**

[www.QEP.com](http://www.QEP.com)

U.S. Headquarters  
866 435 8665

Canada  
800 840 9422

Europe/Middle East  
0031 24 6485348

Australia  
011 61 3 9797 1888

New Zealand  
64 9 415 9700

E1914-9048