

PARTS LIST

Specifications

Motor: 115V-60Hz
2HP

Amps: 16

RPM: 3450 (single speed)

Weight: 118 lbs (54 Kg)

Blade: 10" (250mm)

Arbor: 5/8" (16mm)

Depth of Cut: 3½"

Length of Cut: 20" square
14" diagonal

DESCRIPTION	No.
Front Saw Stand	1-1
Side Saw Stand	1-2
Wheel / Brake Assembly (w/4 bolts, washers, nuts)	2
Stand Knobs (2)	3
Frame Assembly	4
Roller Guide Bar (w/2 bolts, washers, nuts)	5
Water Tray Assembly	6
Drain Plug	7
Angle Bar on Water Tray (w/2 bolts, washers, nuts)	8
Water Tray Brackets for Lock (set of 2 w/screws)	9
Water Pump	10
Water Valve	11
Water Pump Tubing	12
Water Flow "T"	13-1
Water Flow "L"	13-2
"U"-shaped Roller Set	14
Cutting Table	15
Rubber Mat for Cutting Table	16
Ruler Guide (w/4 bolts)	17-1
Ruler Guide Sticker	17-2
L-shaped Supporter (w/2 bolts, washers)	18
Angle Bar Rollers Set	19
Rear Support Post (w/bolt, washers, nuts, 1 hex)	20
Mounting Plate Adjustment (w/nut & lock washer)	21
Motor Support Shaft (w/bolt & washer)	22
Mounting Plate	23
Motor Adjustment Clip (w/bolt & washer)	24
Bearing Housing	25
Blade Shaft Lock Pin	26
Inner Flange	27
Outer Flange	28
Blade Lock Nut	29
Blade Guard	30
Blade Guard Bolt	31
Blade Guard Adjustment Knob	32
Belt Guard Bracket	33
Belt Guard	34
Blade Shaft Lock	35
Power Switch	36
Circuit Breaker	37-1
Waterproof Cover for Circuit Breaker	37-2
Power Switch Housing	38
Power Cord	39
Motor	40
Pulley	41-1
Belt	41-2
Single Socket	42
Splash Guard Flap	43
10" Continuous-Rim Diamond Blade	44
Rubber Mat for Front Extension Table	45
Front Extension Table	46
Rubber Mat for Side Extension Table	47
Side Extension Table	48
Miter Block	49
45°, 90° Rip Guide	50
Saw Stand w/Wheels	51
Universal Wrench	52

EXPLODED PARTS


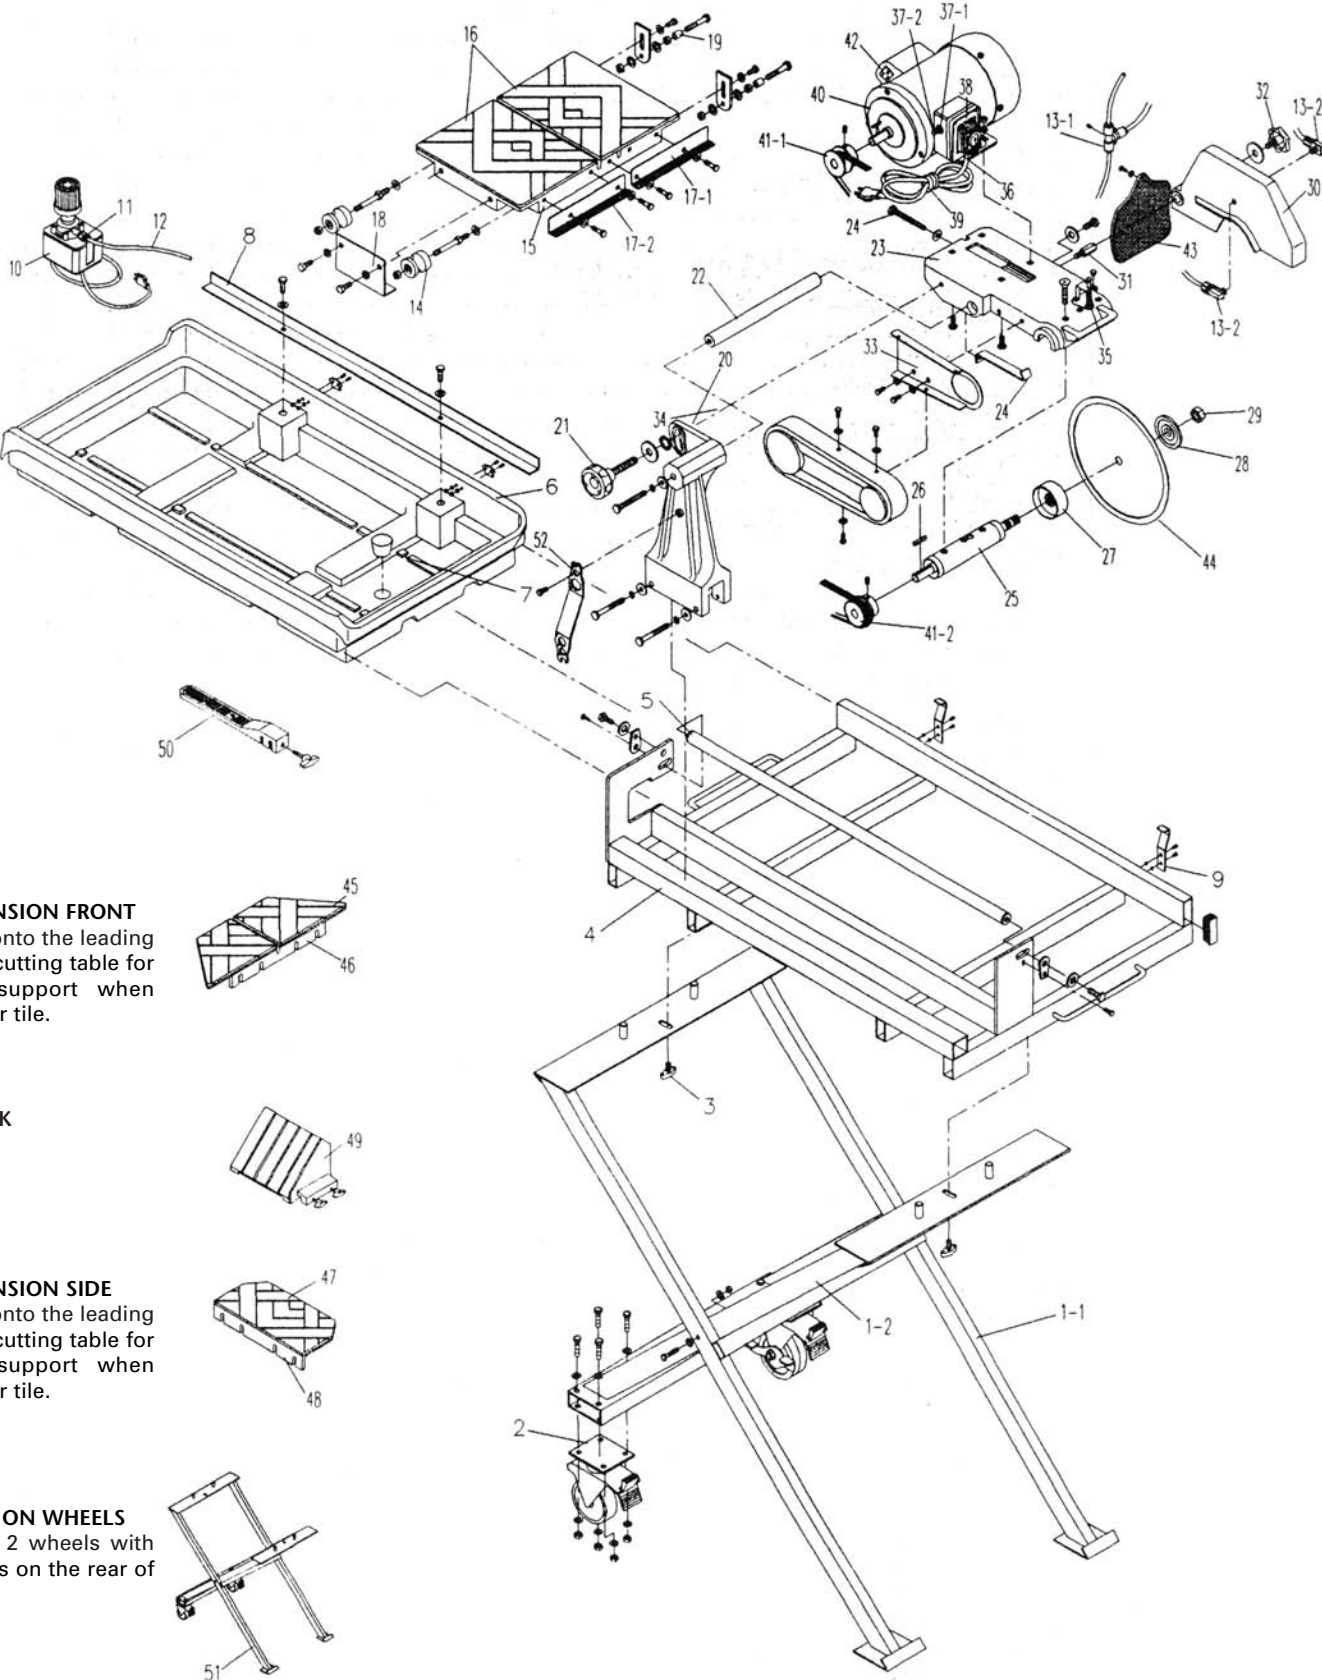



TABLE EXTENSION FRONT
Easily slips onto the leading edge of the cutting table for maximum support when cutting larger tile.



MITER BLOCK



TABLE EXTENSION SIDE
Easily slips onto the leading edge of the cutting table for maximum support when cutting larger tile.



SAW STAND ON WHEELS
Comes with 2 wheels with sturdy brakes on the rear of the stand.

