



Natural Cork Underlayment Sheets

72001Q

INSULATING

Reduces thermal transmission, increasing effectiveness of floor heating systems

R-Value

0.31

SOUND ABSORBING

Reduces sound transmission from both the surface of a floor as well as through the floor to living spaces below

IIC STC Δ
71* | 62* | 24

*Ceramic tile on an 8" concrete slab with a suspended ceiling

CRACK SUPPRESSION

Acts as a crack isolation membrane that resists transfer of stress cracks from subfloor through to flooring surfaces

NATURAL BARRIER


Cork is antimicrobial, mold and mildew resistant

EASY TO INSTALL

In both glue-down and loose lay configurations

VERSATILE

For use under ceramic tile, stone, marble, glued wood flooring and floating floor systems

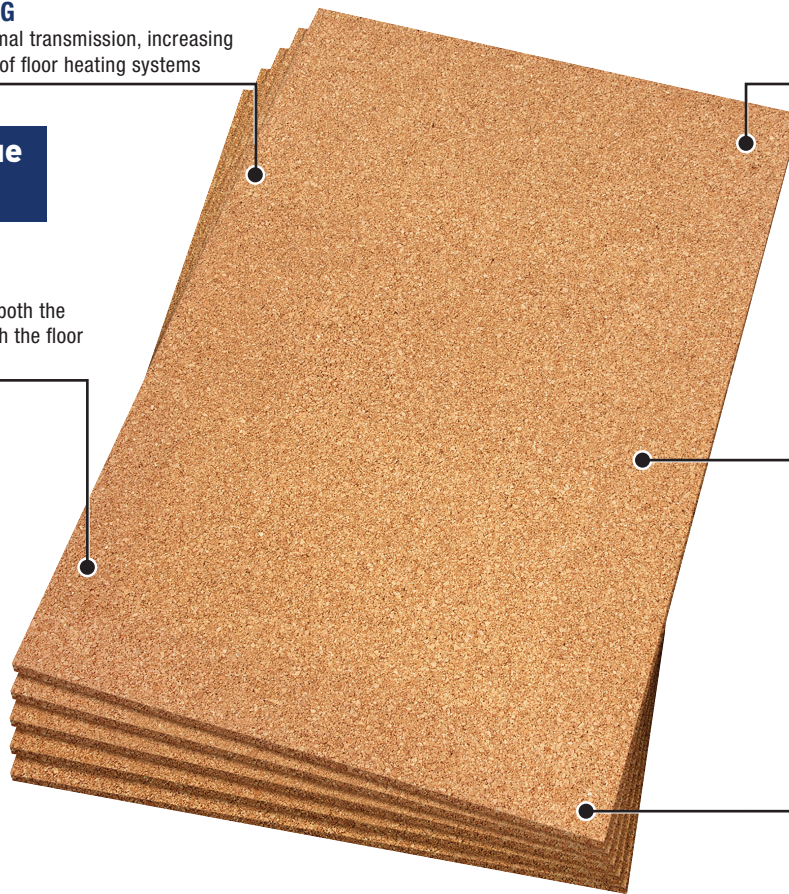

ITEM #	DESCRIPTION	QTY	SIZE	COVERAGE
72001Q	1/2" (12 mm) Sheets	25 sheets	2' x 3'	150 sq. ft./case



Our Natural Cork products may contribute towards satisfying credits under the LEED® Green Building Program in the following areas:

MR 4.1 - 5% Recycled Content of total building materials (post consumer + 1/2 of post industrial)

MR 4.2 - 10% Recycled Content of total building materials (post consumer + 1/2 of post industrial)

MR 6 - Specifying rapidly renewable building materials for 5% of total building materials.

EQ 4.1 - Low Emitting Materials Adhesives & Sealants (Adhesives Specified meet SCAQMD Rule 1168)

Professional Tools for Professional Results

qep.com

0024-12459